

Utensil Washer - Model 9210



Specification Data

JEROS 9210 - Utensil Washer

The 9210 features the unique JEROS® rotating wash system.

With a strong focus on energy and resource saving, JEROS® has developed the 9210 as part of a new generation of utensil washers in a cleaning friendly design. The entire inside of the machine has undergone a radical development. The interior structure of the vessel consists solely of inclined surfaces and curves, so that the water automatically and rapidly will be led back to the filters and pumps. All stainless steel surfaces are completely smooth and dirt will not attach itself to the surfaces.

The 9210 is built with "i-version" as standard meaning it has water saving rinse nozzles. In addition both the wash and rinse tanks are insulated with the lid consisting of 2 layers: Inside, the lid is still made of stainless steel, outside an insulating and noise reducing material has been added to the lid to increase energy savings further and to ensure minimal emission of heat. The 9210 therefore requires less operating power, resulting in energy and water savings of up to 25% for all the models.

The unique, well-known JEROS® lid construction, which ensures optimum ergonomics and capacity in a minimum of space, has been further developed in the 9210.

Further unique features are: The optional integrated mixer tap that can also be used for pre-washing and a flush hose that enables the re-use of the hot soapy water successively or at the end of the working day, if needed.



Optional Extras:

- A = Automatic soap dosage
- B = Integrated mixing tap
- C = End-rinse pump (included)
- D = Rinse hose
- I = Isolate lid, wash & rinsetank (included)
- S = Steam Converter
- W = Wheels, machine mounted on
- P = Pulse wash
- E = Integrated shower tap
- XH = Extra wash height +230mm
- T = Steam connection wash tank

Wash Tank – 51ltrs

Rinse Tank – 11ltrs

Water Consumption per wash – 4ltrs

Wash Pump capacity – 600

Wash Temp – 58°C

Rinse Temp – 85°C

Wash Time (min) – 3+3+6

Wash Pressure – 1.2 Bar

Rinse Pressure – 1.1 Bar

Wash Pump – 1.4Kw

Current Rating – 16 Amp

Connection – 6.5Kw

Dimension

Wash Area - W x H x D mm

690 x 590 x 635

Machine – H1 x H2 x W x D





2100 x 1631 x 840 x 855



JEROS A/S
Nyborgvej 8
5750 Ringe - Denmark

Phone: + 45 63 62 39 13
Email: jeros@jeros.com
Web: www.jeros.com

Installation Guide - Model 9210

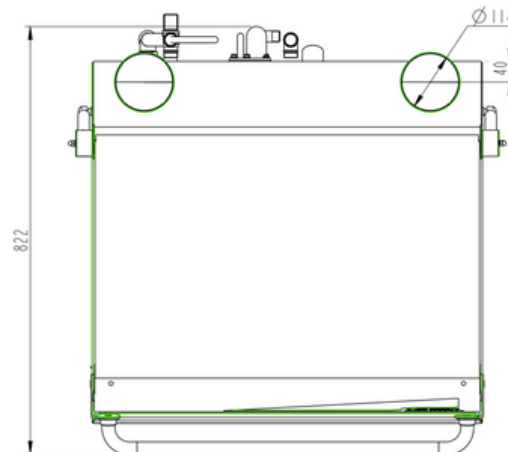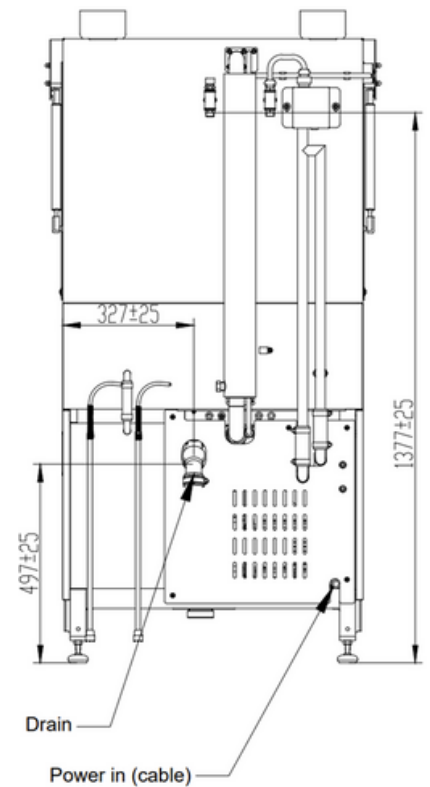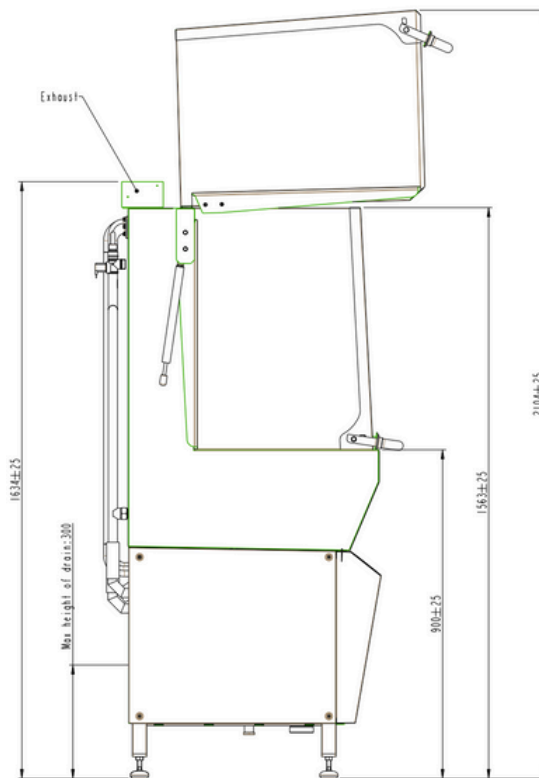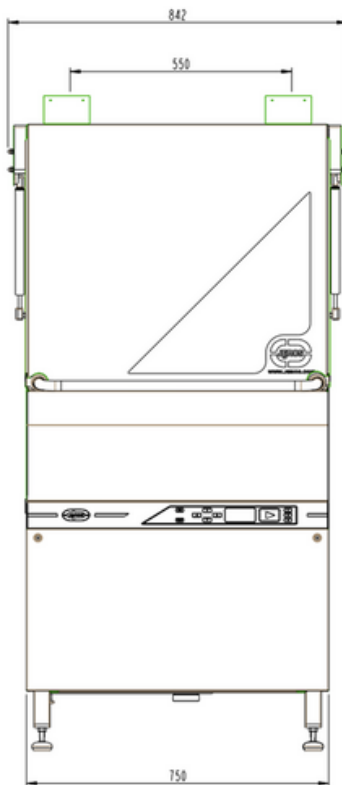

Installation		Capacity	Qty
Voltage Standard	3N~400V + PE 50Hz	Euronorm crates 400 x 600	1 15
Max. power/main fuses	6.5kW/16A	Plates 600 x 400	15
Heat Elements	1 x 2.0 kW + 1x4.5 kW	Plates 600 x 460	- 1 1
Power cable (standard)	5 x 2.5" x 2500mm	Plates 600 x 800	-
Water connection, dimension	1/2" RG	Gastronomy tray 500 x 500	
Water connection, pressure	1.5—6 dyn bar	60 L—Bowl H 511 x ø 575	
Water connection, temperature	Ca 56°	80 L—Bowl H 515 x ø 645	
Drain dimension	40mm diameter		
Recommended exhaust capacity	180 m3/h		