Smarter Solutions

PRODUCT SPECIFICATION

MODEL 9215

NEW GENERATION



SMALL FOOTPRINT. HIGH PERFORMANCE.

Designed around the operator

The JEROS 9210 represents a new generation of utensil washers, developed with a strong focus on the operator, daily hygiene and long-term reliability.

Its reinforced construction, improved drainage and glass-bead-blasted surface help reduce dirt build-up and make the machine easier to clean.
The JEROS 9215 is wider than the 9210.

HIGHLIGHTS OF THE NEW GENERATION:

- Up to 20°C lower exterior surface temperature
- New, intuitive control system
- Polycarbonate inspection window
- Improved drainage and easier cleaning
- Reinforced construction for greater durability
- Modular design and simplified service access







3.8 L	2 / 4 / 6	Wash Area
WATER PER WASH	WASH TIME PER MIN STANDART	W x H x D 810 x 590 x 635 mm

Technical Data

Wash tank	53 litres	**Wash time (min)**	2 + 4 + 6
Rinse tank	11 litres	**Wash pressure**	1.4 bar
Water consumption	3.8 litres / wash	**Rinse pressure**	1.1 bar
Wash pump capacity	950	**Wash pump**	2 kW
Wash temperature	58°C	**Discharge Flow Rate**	0.4 ltrs p/s
Rinse temperature	85°C	**Current rating**	16 Amp
Discharge per wash	3,8 litres	**Connection**	6.5 kW
Temp. of Discharge Water	50°C		

Dimensions

Wash area: (W × H × D)	810 × 590 × 635 mm
Machine: (H1 - H2 × W × D)	2100 - 1631 × 960 × 855 mm

Washing capacity

Euronorm Crates:	400 × 600 mm	2
Gastronom Tray:	500 × 500 mm	1
Bowl, 60 litre:	H 511 × Ø 575 mm	1
Plates:	600 × (400 mm; 460 mm; 800 mm)	30; 15; 15

OPTIONS

A	Automatic Soap dosage
B	Integrated mixing tap
C	End-rinse pump (included)
D	Rinse hose
E	Integrated shower tap
G	Extended grip +200 mm
I	Insulated lid and tanks (included)
LL	Lid Lock
S	Steam converter
T	Extra wash height +230 mm
W	Machine mounted on wheels

STANDARD I-VERSION
Double-insulated lid + Wash- and Rinse tanks + Rinse pump included


Certified by:

eurofins | Steins Laboratorium

INSTALLATION GUIDE

MODEL 9215

Installation Drawing

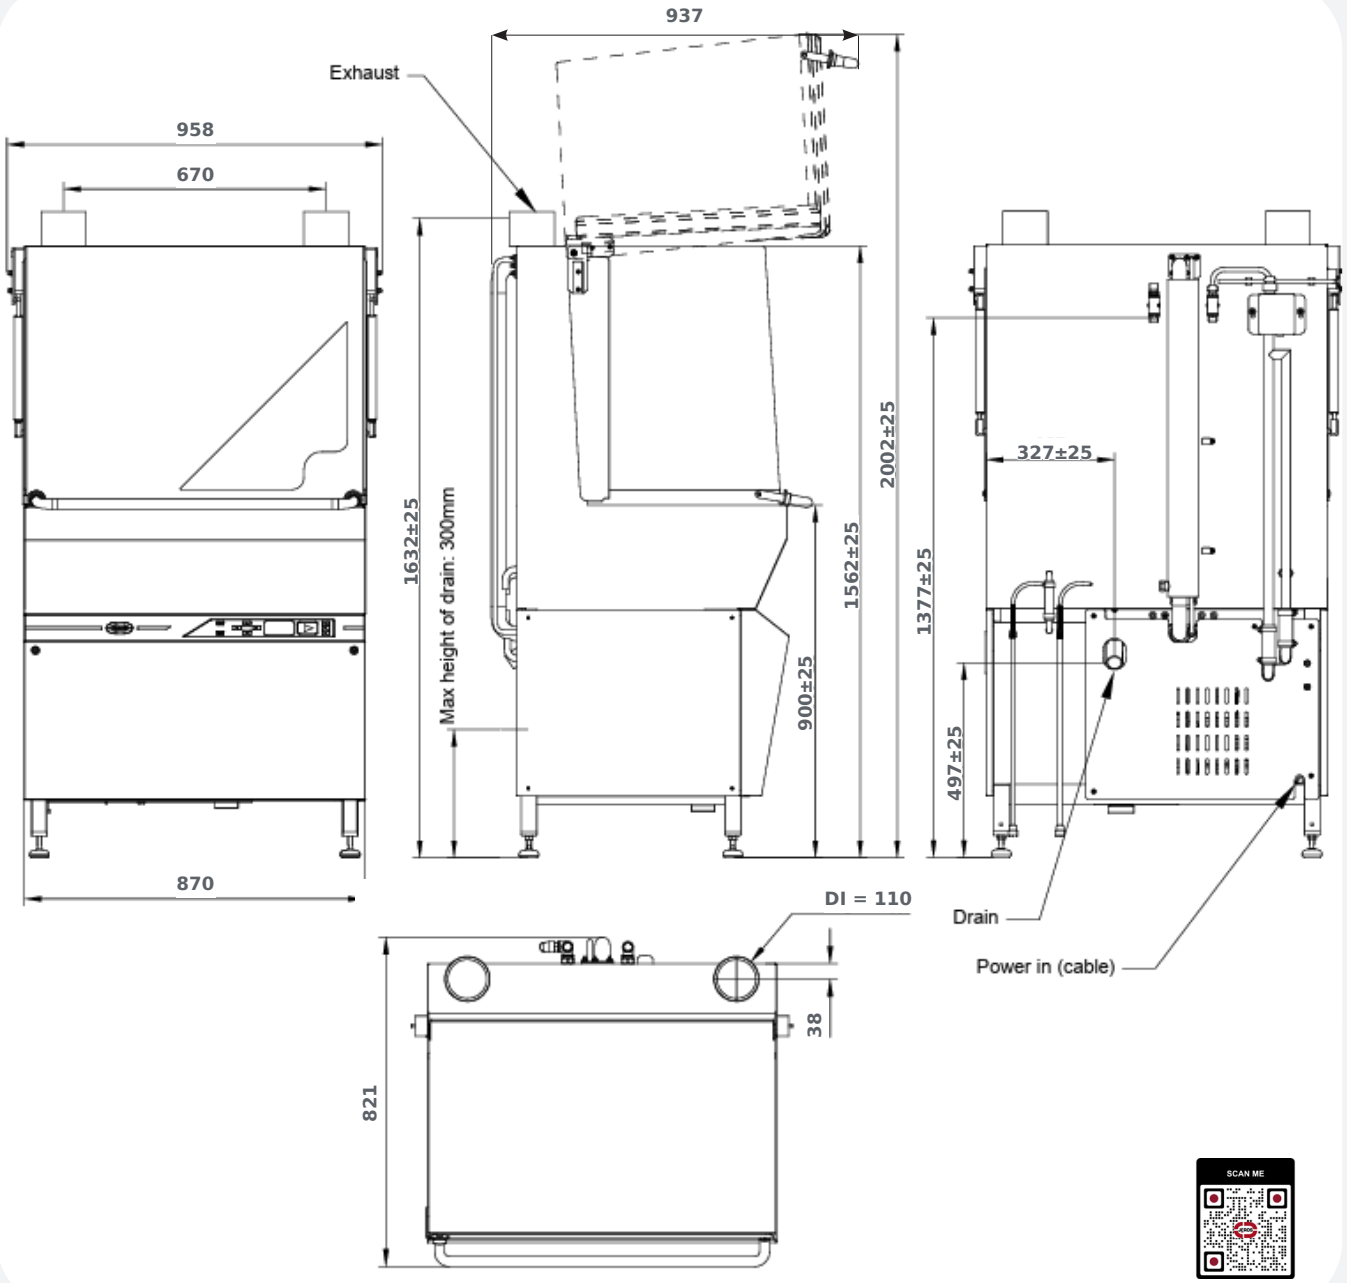

Installation

Voltage standard	3N~400V + PE 50Hz	**Water connection, pressure**	1.5 - 6 dyn bar
Max. power/main fuses	6.5W/16A	**Water connection, temperature**	Rec. 50 - 60°C
Heat elements	1 x 2.0 kW + 1 x 4.5 kW	**Drain Dimension**	ø 40 mm
Power cable (standard)	5 x 2,5” x 2500 mm	**Recommended exhauster capacity**	180 m 3/h
Water connection, dimension	1/2” RG	**Accessories:** **Hose for water connection**	1 /2” x 1600 mm

Other voltage on request
At over 8*dH use of decalcificated water recommended