

Utensil Washer - Model 9120



Specification Data

JEROS 9120 - Utensil Washer

The 9120 features the unique JEROS® wash frame system.

With a strong focus on energy and resource saving, JEROS® has developed the 9120 as part of a new generation of utensil washers in cleaning friendly design. The entire inside of the machine has undergone a radical development. The interior structure of the vessel consists solely of inclined surfaces and curves, so that the water automatically and rapidly will be led back to the filters and pumps. All stainless steel surfaces are completely smooth and dirt will not attach itself to the surfaces.

The 9120 is built with "i-version" as standard meaning it has water saving rinse nozzles. In addition both the wash and rinse tanks are insulated with the lid consisting of 2 layers: Inside, the lid is still made of stainless steel, outside an insulating and noise reducing material has been added to the lid to increase energy savings further and to ensure minimal emission of heat. The 9120 therefore require less operating power, resulting in energy and water savings of up to 25% for all the models.

The unique, well-known JEROS® lid construction, which ensures optimum ergonomics and capacity in a minimum of space, has been further developed in the 9120.

Further unique features are: The optional integrated mixer tap that can also be used for pre-washing and a flush hose that enables the re-use of the hot soapy water successively or at the end of the working day, if needed.



Optional Extras:

- A = Automatic soap dosage
- B = Integrated mixing tap
- C = End-rinse pump (included)
- D = Rinse hose
- I = Isolate lid, wash & rinsetank (included)
- S = Steam Converter
- W = Wheels, machine mounted on
- P = Pulse wash
- E = Integrated shower tap
- XH = Extra wash height +230mm (included)
- H = Automatic lid opening system
- F = Main switch
- T = Steam connection wash tank

General Data:

Wash Tank – 86ltrs	Wash Time (min) – 3+3+6
Rinse Tank – 25ltrs	Wash Pressure – 0.8 - 1.2 Bar
Water Consumption per wash – 10ltrs	Rinse Pressure – 1.1 Bar
Wash Pump capacity – 2 x 600	Wash Pump – 2 x 1.4 Kw
Wash Temp – 58°C	Current Rating – 32 Amp
Rinse Temp – 85°C	Connection – 13.5Kw

Dimension


Wash Area - W x H x D mm	1010 x 645 x 635
Machine – H1 x H2 x W x D	2100 x 1631 x 1280 x 855



JEROS UK Ltd
Unit 13 Delta Court, Sky Business Park,
Second Avenue, Doncaster, South Yorkshire, DN9 3GN
Phone: 0843 2892881 Email: info@jeros.uk.com

www.jeros.uk.com

Installation Guide - Model 9120

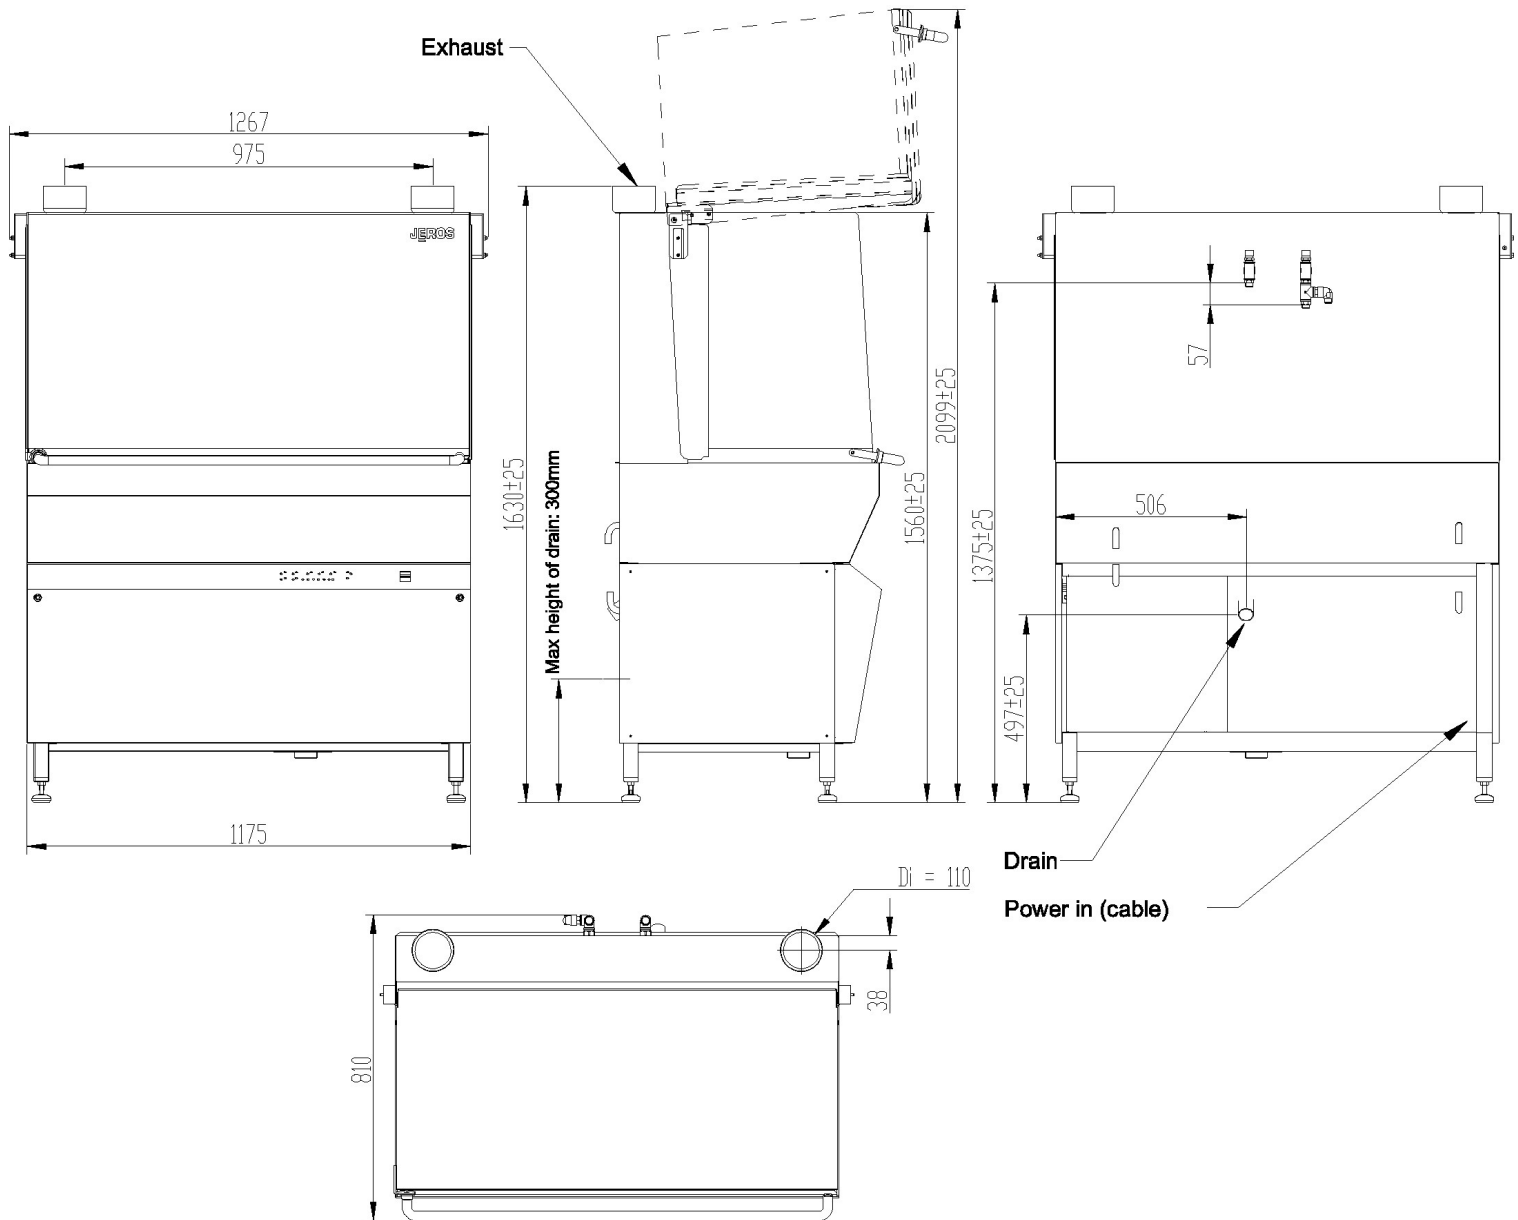

Installation	
Voltage Standard	3N~400V + PE 50Hz
Max. power/main fuses	13.5kW/32A
Heat Elements	1 x 4.5 kW + 2x4.5 kW
Power cable (standard)	5 x 2.5" x 2500mm
Water connection, dimension	1/2" RG
Water connection, pressure	1.5—6 dyn bar
Water connection, temperature	Ca 56°
Drain dimension	40mm diameter
Recommended exhaust capacity	360 m3/h

Capacity	Qty
Euronorm crates 400 x 600	2
Plates 600 x 400	30
Plates 600 x 460	30
Plates 600 x 800	15
Gastronomy tray 500 x 500	2
60 L—Bowl H 511 x ϕ 575	1
80 L—Bowl H 515 x ϕ 645	1



JEROS UK Ltd
Unit 13 Delta Court, Sky Business Park,
Second Avenue, Doncaster, South Yorkshire, DN9 3GN
Phone: 0843 2892881 Email: info@jeros.uk.com

www.jeros.uk.com