

# Utensil Washer - Model 9130



## Specification Data

### JEROS 9130 - Utensil Washer

The 9130 features the unique JEROS® wash frame system.

With a strong focus on energy and resource saving, JEROS® has developed the 9130 as part of a new generation of utensil washers in cleaning friendly design. The entire inside of the machine has undergone a radical development. The interior structure of the vessel consists solely of inclined surfaces and curves, so that the water automatically and rapidly will be led back to the filters and pumps. All stainless steel surfaces are completely smooth and dirt will not attach itself to the surfaces.

The 9130 is built with "i-version" as standard meaning it has water saving rinse nozzles. In addition both the wash and rinse tanks are insulated with the lid consisting of 2 layers: Inside, the lid is still made of stainless steel, outside an insulating and noise reducing material has been added to the lid to increase energy savings further and to ensure minimal emission of heat. The 9130 therefore require less operating power, resulting in energy and water savings of up to 25% for all the models.

The unique, well-known JEROS® lid construction, which ensures optimum ergonomics and capacity in a minimum of space, has been further developed in the 9130.

Further unique features are: The optional integrated mixer tab that can also be used for pre-washing and a flush hose that enables the re-use of the hot soapy water successively or at the end of the working day, if needed.

### Optional Extras:

- A = Automatic soap dosage
- B = Integrated mixing tap
- C = End-rinse pump (included)
- D = Rinse hose
- I = Isolate lid, wash & rinsetank (included)
- S = Steam Converter
- W = Wheels, machine mounted on
- P = Pulse wash
- E = Integrated shower tap
- H = Automatic lid opening system
- F = Main switch
- T = Steam connection wash tank

### General Data:

<b>Wash Tank</b> – 128ltrs	<b>Wash Time (min)</b> – 3+3+6
<b>Rinse Tank</b> – 30ltrs	<b>Wash Pressure</b> – 0.8 - 1.3 Bar
<b>Water Consumption per wash</b> – 12ltrs	<b>Rinse Pressure</b> – 1.1 Bar
<b>Wash Pump capacity</b> – 600 + 950	<b>Wash Pump</b> – 1.4 + 2Kw
<b>Wash Temp</b> – 58°C	<b>Current Rating</b> – 32 Amp
<b>Rinse Temp</b> – 85°C	<b>Connection</b> – 16.5Kw

### Dimension


<b>Wash Area</b> - W x H x D mm	1290 x 645 x 735
<b>Machine</b> – H1 x H2 x W x D	2100 x 1631 x 1555 x 955



JEROS UK Ltd  
Unit 13 Delta Court, Sky Business Park,  
Second Avenue, Doncaster, South Yorkshire, DN9 3GN  
Phone: 0843 2892881 Email: [info@jeros.uk.com](mailto:info@jeros.uk.com)

[www.jeros.uk.com](http://www.jeros.uk.com)

# Installation Guide - Model 9130

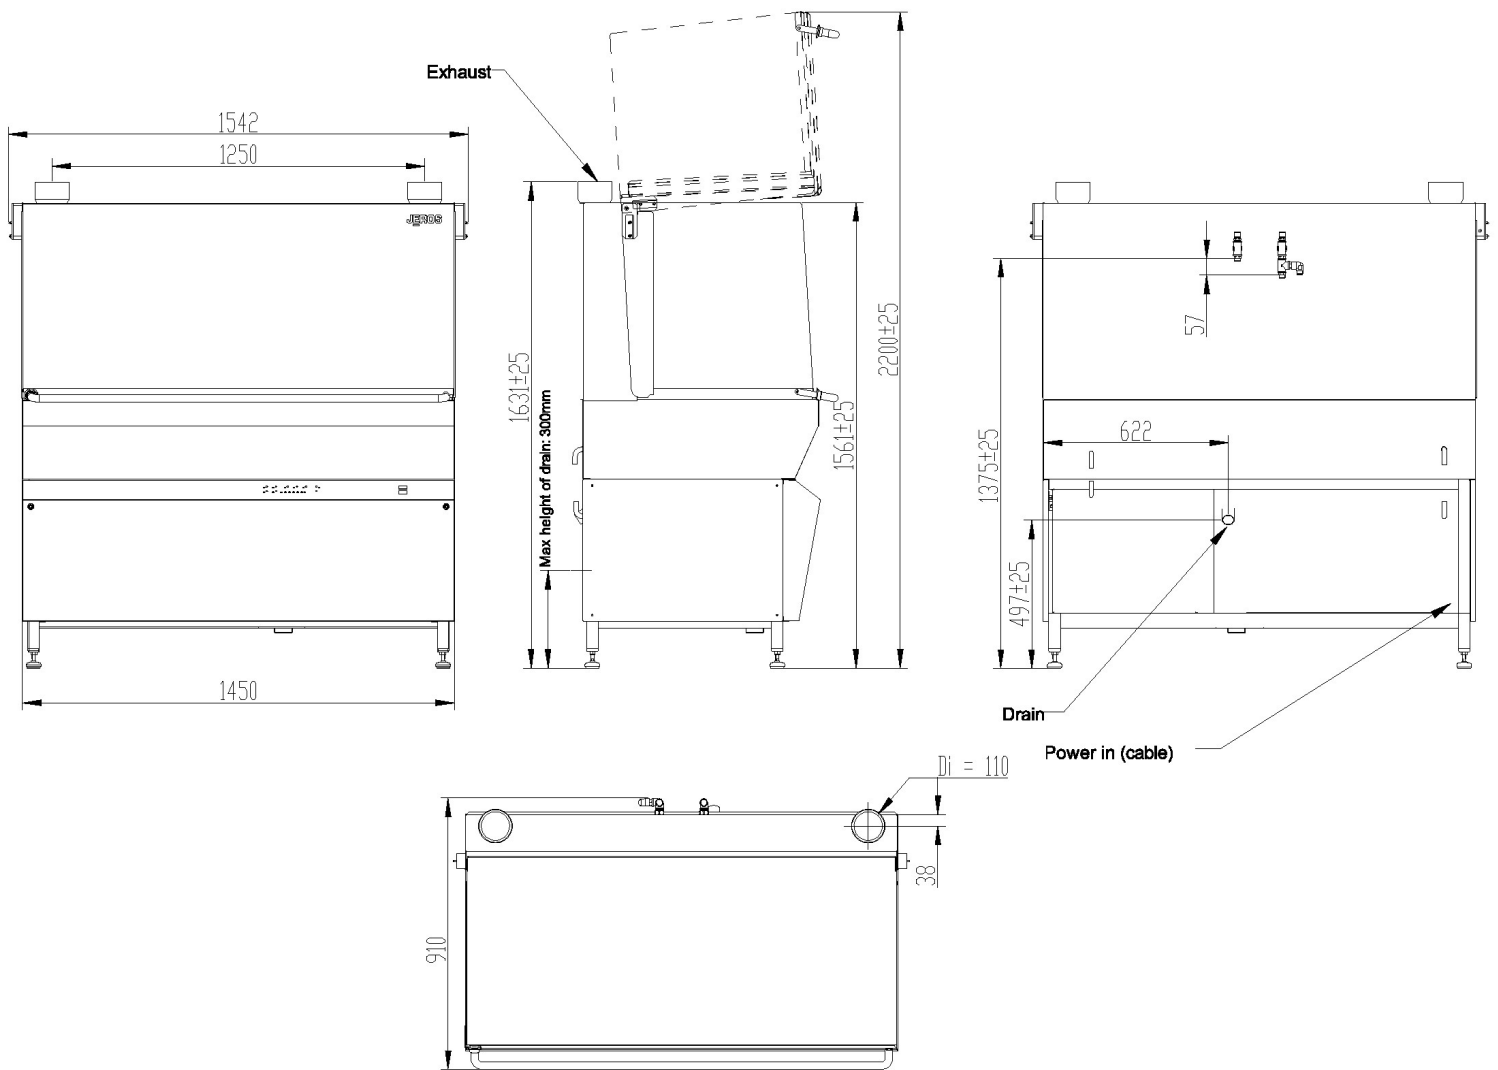

Installation	
Voltage Standard	3N~400V + PE 50Hz
Max. power/main fuses	16.5kW/32A
Heat Elements	1 x 4.5 kW + 2x6 kW
Power cable (standard)	5 x 2.5" x 2500mm
Water connection, dimension	1/2" RG
Water connection, pressure	1.5—6 dyn bar
Water connection, temperature	Ca 56°
Drain dimension	40mm diameter
Recommended exhaust capacity	350 m3/h

Capacity	Qty
Euronorm crates 400 x 600	3
Plates 600 x 400	45
Plates 600 x 460	30
Plates 600 x 800	15
Gastronomy tray 500 x 500	2
60 L—Bowl H 511 x ø 575	2
80 L—Bowl H 515 x ø 645	2



[View Full Utensil Range Brochure.](#)